




18GBPS HDBASET 16x16 MODULAR MATRIX SWITCH AC-MX1616-AUHD-HDBT-CHASSIS

THIS POWERHOUSE MATRIX SWITCHER IS THE IDEAL SOLUTION FOR A MULTIZONE SETUP THAT HAS 4K SOURCES AND UP TO 16 ZONES. THE AC-MX1616-AUHD-HDBT-CHASSIS IS A MODULAR MATRIX SWITCHER — THAT MEANS YOU DETERMINE HOW MANY INPUTS AND OUTPUTS IT HAS. FOR EXAMPLE, IF THE JOB CALLS FOR 6 INPUTS AND 14 OUTPUTS WE WILL BUILD YOU A 6x14 HDBASET MATRIX SWITCHER READY FOR ANY 4K HDR SIGNAL YOU THROW AT IT. COMBINE THAT WITH THE LED SETUP SCREEN ON THE FRONT, AND YOU WON'T HAVE ANY PROBLEMS GETTING THIS SWITCH UP AND RUNNING.

Need to downmix? No problem. Select the AC-MX1616-IN-AUHD-AVDM as your input card type and you now have the ability to downmix beyond 7.1 audio into a 2 channel signal. If you have no need for downmixing, order the AC-MX1616-IN-AUHD to keep costs down. This powerhouse matrix switcher is the ideal solution for a multizone setup that has 4K sources and up to 16 zones. Control is a breeze as this switch comes with a web GUI you can access via the IP address, as well as drivers for all the top control systems. Combine that with the LED setup screen on the front, and you won't have any problems getting this switch up and running. This switch also has the ability to distribute 18Gbps 4K to some zones and 1080p to others with built in 4K to 1080p downscalers. These features and more make the AC-MX1616-AUHD-HDBT-CHASSIS the integrators choice for large multizone distribution systems.

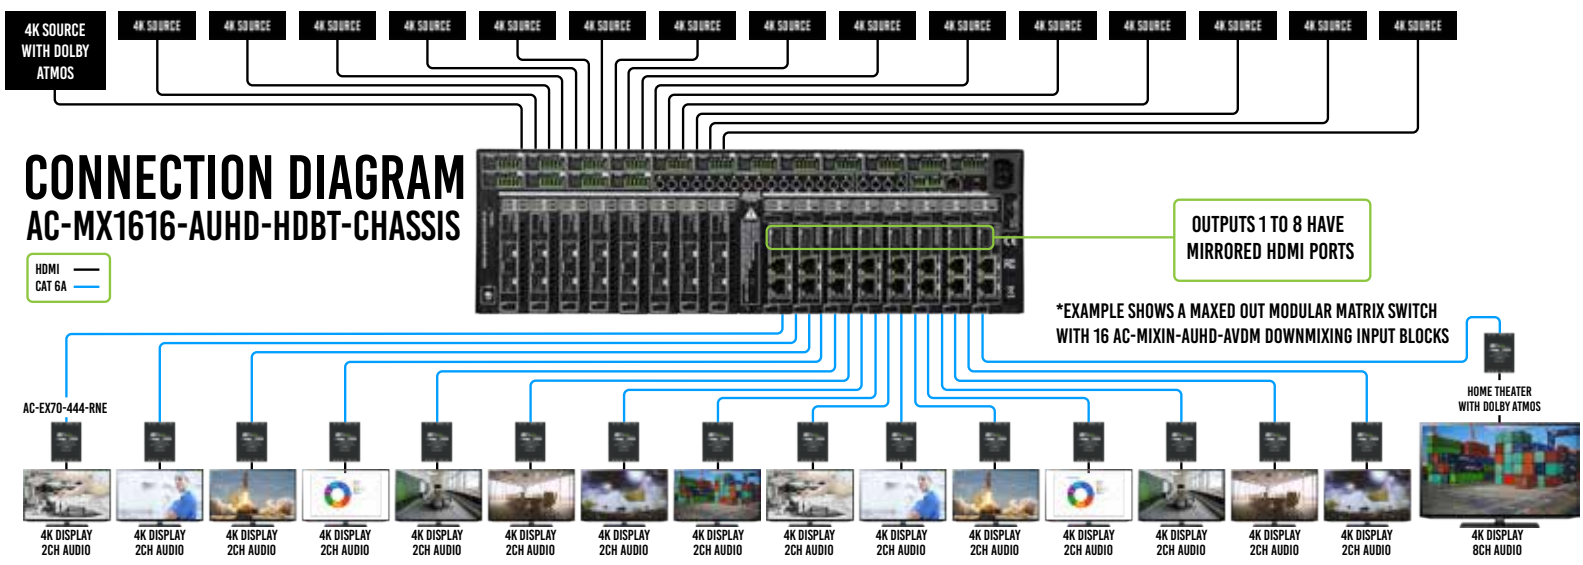

MAXIMUM PRODUCT SPECIFICATIONS

VIDEO	
VIDEO RESOLUTIONS	UP TO 4K 60HZ 4:4:4
VESA RESOLUTIONS	UP TO DCI 4K (4096X2160)
HDR FORMATS/RESOLUTIONS	420, 422, 444 (10 AND 12 DEEP COLOR) HDR10, HDR10+, DOLBY VISION (24/30 FRAMES), HLG
COLOR SPACE	YUV (COMPONENT), RGB (CSC: REC. 601, REC. 709, BT2020, DCI, P3 D6500)
CHROMA SUBSAMPLING	4:4:4, 4:2:2, 4:2:0 SUPPORTED
DEEP COLOR	UP TO 16 BIT (1080), UP TO 12 BIT (4K)
SCALERS (HDMI) PER OUTPUT OPTIONAL	1080P TO 4K (RESOLUTION ONLY, FRAMERATE STAYS THE SAME)
SCALERS (HDBASET) PER OUTPUT OPTIONAL	4K TO 1080P (RESOLUTION ONLY, FRAMERATE STAYS THE SAME)
AUDIO	
AUDIO FORMATS SUPPORTED HDMI	PCM 2.0 CH, LPCM 5.1 & 7.1, DOLBY DIGITAL, DTS 5.1, DOLBY DIGITAL PLUS, DOLBY TRUEHD, DTS-HD MASTER AUDIO, DTS-X, DOLBY ATMOS
AUDIO FORMATS SUPPORTED EXTRACTED (TOSLINK)	PCM 2 CH, LPCM 6 CH, LPCM 7 CH, DOLBY DIGITAL, DOLBY DIGITAL PLUS, DTS-HD MASTER AUDIO
AUDIO FORMATS SUPPORTED EXTRACTED (2CH PORT)	PCM 2 CH (DOWNMIXED WHEN USING AC-MXIN-AUHD-AVDM)
AUDIO EXTRACTION LOCATION	BIND TO INPUT, BIND TO OUTPUT OR MATRIX (INDEPENDENT)
AUDIO DELAY (PER OUTPUT, EXTRACTED)	UP TO 630MS
DISTANCE	
HDBASET OUT (4K60 4:4:4 & HDR) W/ AC-EX70-444-RNE	70 METERS / 230 FEET (CAT 6A)
HDBASET OUT (1080P) W/ AC-EX70-444-RNE	100 METERS / 330 FEET (CAT 6A)
HDBASET OUT (4K60 4:2:0 MAX) W/ AC-EX70-UHD-R	40 METERS / 131 FEET (CAT 6A)
HDBASET OUT (1080P) W/ AC-EX70-UHD-R	70 METERS / 230 FEET (CAT 6A)
HDMI IN/OUT (4K60 4:4:4)	UP TO 50 FEET (USING BULLET TRAIN HDMI)
HDMI IN/OUT (W/ AOC CABLE) (4K60 4:4:4)	UP TO 130 FEET (USING BULLET TRAIN AOC)
OTHER	
BANDWIDTH HDMI	18Gbps UNCOMPRESSED
BANDWIDTH HDBASET	18Gbps (USES ICT ABOVE 10.2 Gbps SIGNALS)
HDCP	HDCP 2.2 AND EARLIER
POH FOR RECEIVERS (NO NEED TO POWER RECEIVERS)	YES, ALL OUTPUTS
CONTROL:	
PORTS	LAN, RS232, IR, MICRO USB
DRIVERS	C4, RTI, ELAN, CRESTRON, URC (FOR MORE - SEE DRIVERS PAGE)
LAN WEBOs	YES
PORTS	
HDMI	TYPE A
HDBASET	RJ45 W/ POH FOR HDBASET RECEIVERS
LAN	RJ45 W/ WEB INTERFACE/CONTROL
AUDIO (EXTRACTED DIGITAL)	TOSLINK
AUDIO (EXTRACTED ANALOG)	5 PIN TERMINAL BLOCK (BALANCED)
IR RX	3.5MM STEREO (3 CONDUCTOR)
RS232	3 PIN TERMINAL BLOCK
ENVIRONMENTAL	
OPERATING TEMPRATURE	23 TO 125°F (-5 TO 51°C)
STORAGE TEMPERATURE	-4 TO 140°F (-20 TO 60°C)
HUMIDITY RANGE	-4 TO 140°F (-20 TO 60°C)
POWER	
POWER CONSUMPTION (TOTAL)	56 WATTS MAX
POWER SUPPLY - MATRIX	INPUT: AC 100-240V ~ 50/60HZ OUTPUT: DC 48V 2A
DIMENSIONS	
DIMENSIONS (UNIT ONLY HEIGHT/DEPTH/WIDTH)	
DIMENSIONS (PACKAGED HEIGHT/DEPTH/WIDTH)	
RACK UNITS	
WEIGHT (UNIT)	
WEIGHT (PACKAGED)	

*SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE. MASS & DIMENSIONS ARE APPROXIMATE



AC-MX1616-IN-AUHD-AVDM



AC-MX1616-IN-AUHD



AC-MX1616-OUT-AUHD-HDBT

KEY FEATURES

- HDMI 2.0(a/b)
- 18Gbps Bandwidth Support
- 4K60 4:4:4 Support
- Flexibility
- Ultimate HDR Support (HDR 10 & 12 Bit)
- Dolby Vision, HDR10+ and HLG Support
- HDCP 2.2 (and all earlier versions supported)
- Simple setup with front panel control screen
- Web GUI for simple connectivity and control/management
- Advanced EDID Management
- IR, RS-232 and LAN Control Options
- Front Panel Control
- Digital Coax Audio Out (6CH PCM, DD, DTS)
- Driver Support for Crestron, C4, RTI, ELAN and more!
- Extracted Audio Now Has 3 Operating Modes. Bound to Input, Bound to Output, or Independent Matrix
- Mirrored HDMI Outputs
- Built in Downscalers (If using the AVDM input card)
- ICT used in the HDBaseT outputs