

## Product Data Sheet


☎ 1-888-452-HANA (4262) ✉ info@hanawireless.com

✉ 9465 Southampton Pl, Boca Raton, FL 33434, USA



Model: HW2-N20-1HF

20x16x11 Inch Weatherproof Enclosure with 120 Vac Mounting Plate, Thermostat Controlled Heating & Cooling System

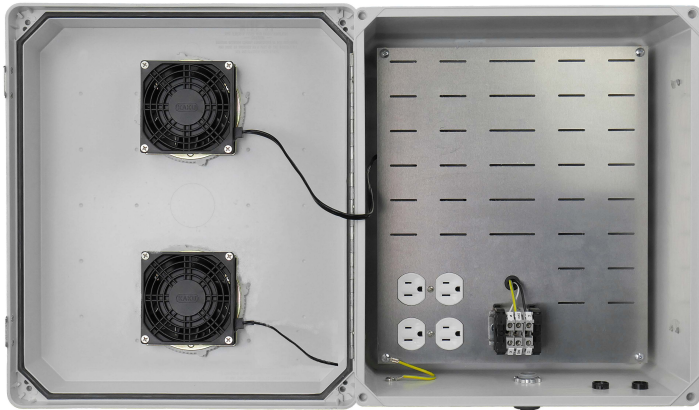

### Features

- Molded Fiberglass Reinforced Polyester (FRP)
- Stainless steel quick-release latches with padlock hasps
- NEMA Type 3R, 3RX / IP24 rated, fully gasketed lid
- Integral mounting flange, mast mounting option
- Aluminum mounting plate with 120 Vac outlets, thermostat-controlled fan/heater, patented (US8014157) slotted accessory mounting design

### Applications

- Remote wireless LAN Wi-Fi equipment installations
- Indoor and outdoor installations
- Rapid deployment and hotspot installations
- Harsh and corrosive environments
- Protection of equipment from theft and damage

### Specifications

Material	FRP
Color	Tool Gray – RAL 7035
Voltage   Vac	120
Heater   F° (C°)	140 (60) PTC-Type
Heat Temperature ON/OFF   F° (C°)	40 (4) +/-5 / 60 (15) +/-3
Fan Power   Watt	24
Fan Temperature ON/OFF   F° (C°)	100 (38) +/-3 / 70 (21) +/-5
Mounting Plate Dimensions   in (mm)	18.8 (478) x 14.8 (375) x 0.1 (2.5)
Mounting Plate Material	Anodized Aluminum
Weight   lb (kg)	25.3 (11.5)
Outside Dimensions, Max   in (mm)	21.3 (541) x 17.3 (440) x 11.6 (294)
Inside Dimensions   in (mm)	19.7 (500) x 15.7 (399) x 9.7 (246)
Flame Rating	UL 94-5V
RoHS	Compliant
Environmental Rating   NEMA - IP	3R, 3RX - 24
Cable Feed	1/2in Conduit Connector

### Package Specifications

Package Quantity	1 per Carton
Length   in (mm)	20.0 (508)
Width   in (mm)	20.0 (508)
Depth   in (mm)	20.0 (508)
Weight   lb (kg)	25.8 (11.7)



Wireless That Works