

IGS-402S-4PH24

4x 10/100/1000Base-T+ 2x 100/1000Base-X SFP Slot with 4x PoE+ Ethernet Switch (120 Watts, 24V Booster)



IGS-402S-4PH24 model is a non-managed industrial grade Gigabit PoE (Power over Ethernet) switch with 4x 10/100/1000Base-T PoE ports and 2 SFP Gigabit Ethernet fiber ports that provide stable and reliable Ethernet transmission. Housed in rugged DIN rail or wall mountable enclosures, these switches are designed for harsh environments, such as industrial networking, intelligent transportation systems (ITS) and are also suitable for many military and utility market applications where environmental conditions exceed commercial product specifications. Standard operating temperature range models (-10 to 60°C) and wide operating temperature range models (-40 to 75°C) fulfill the special needs of industrial automation applications.

Features

- Provides 4-port IEEE802.3at/af PoE output (30W/Per Port)
- Maximum PoE output power budget 120W
- 24/48VDC Redundant dual input power design
- 4-Port 1000Base-T RJ-45 with 2 Fiber Gigabit Ethernet
- Regulated PoE output voltage at 55VDC
- Wide operating temperature -40 ~ 75°C (IGS-402S-4PHE24)
- UL60950-1, CE, FCC, EN50121-4 certification
- Industrial Grade EMS, EMI, EN61000-6-2, EN61000-6-4 Certified
- IP30 rugged metal housing

Specifications

IEEE Standard	IEEE 802.3 10Base-T Ethernet IEEE 802.3u 100Base-TX Fast Ethernet IEEE 802.3ab 1000Base-T Gigabit Ethernet IEEE 802.3z 1000Base-X Gigabit Ethernet IEEE 802.3x Flow Control and Back Pressure IEEE 802.3at, IEEE802.3af
Switch Architecture	Back-plane (Switching Fabric): 12Gbps
Data Processing	Store and Forward
Flow Control	IEEE 802.3x flow control, back pressure flow control
Provides Broadcast Storm Protection	Present, Enable / Disable set by DIP SW
Jumbo Frame	10K Bytes
MAC Address Table	8K
Packet Buffer Size	1Mbits
PoE Standard	IEEE 802.3at/af
PoE RJ-45 Pin Assignment	RJ-45 port # 1~# 4 support IEEE 802.3at/af End-Span, Alternative A mode Positive (V+): RJ-45 pin 1, 2. Negative (V-): RJ-45 pin 3, 6. Data (1, 2, 3, 6, 4, 5, 7, 8)
Network Connector	4 x RJ-45 10/100/1000Base-T auto negotiation speed, Auto MDI/MDI-X function, Full/Half duplex 2 x SFP 100/1000Base-X dual mode slot
Network Cable	UTP/STP above Cat. 5e cable EIA/TIA-568 100-ohm (100m) Fiber Cable (Multi-mode): 50/125um, 62.5/125um Fiber Cable (Single-mode): 9/125um
Protocols	CSMA/CD
LED	Per unit: Power 1 (Green), Power 2 (Green), Fault (Amber) Per RJ-45 port : Link/Active (Green), Speed 10 (OFF), 100 (Green), 1000 (Yellow) Fiber Per port: Link/Active (Green) PoE Port LED : • Active : ON • Inactive : OFF • Fault : Flash (Over Load, Short Circuit, Port failed at Startup)
Safety	UL60950-1
Rail Traffic	EN 50121-4
MTBF	334,448 Hours
Warranty	5 years

DIP SW	DIP 1 ON : Disable power failure alarm OFF : Enable power failure alarm DIP 2 ON : Disables broadcast storm protection OFF : Enable broadcast storm protection DIP 3 ON : Fiber 2 for 100Base-FX SFP OFF : Fiber 2 for Gigabit SFP DIP 4 ON : Fiber 1 for 100Base-FX SFP OFF : Fiber 1 for Gigabit SFP
Reserve Polarity Protection	Present
Overload Current Protection	Present
Power Supply	Redundant Dual DC 24/48V (20~57VDC) Input power (Removable Terminal Block)
Power Consumption	Max 143W @24VDC input (support up to 120W for PoE Output)
PoE Power Output	Maximum PoE Output power budget 120W (30W/Per Port)
Alarm Relay Contact	Relay outputs with current carrying capacity of 1 A @24VDC
Removable Terminal Block	Provide 2 Redundant power, Alarm relay contact, 6 Pin
Operating Temperature	-10 ~ 60°C (IGS-402S-4PH24) -40 ~ 75°C (IGS-402S-4PHE24)
Operating Humidity	5% to 95% (Non-condensing)
Storage Temperature	-40 ~ 85°C
Housing	Rugged Metal, IP30 Protection
Dimensions	106 x 62.5 x 134.8mm (D X W X H)
Weight	0.84kg
Installation Mounting	DIN Rail mounting or wall mounting
EMC/EMS	CE, FCC
EMI	FCC Part 15 Subpart B Class A, CE EN 55022 Class A
EMS	EN61000-6-4 – Emission for industrial environment EN61000-6-2 – Immunity for Industrial environment EN61000-4-2 (ESD) Level 3, Criteria B EN61000-4-3 (RS) Level 3, Criteria A EN61000-4-4 (EFT) Level 3, Criteria A EN61000-4-5 (Surge) Level 3, Criteria B EN61000-4-6 (CS) Level 3, Criteria A EN61000-4-8 (Magnetic Field) Level 3, Criteria A
Shock	IEC 60068-2-27
Freefall	IEC 60068-2-32
Vibration	IEC 60068-2-6

Specifications & design are subject to change without prior notice. Please visit CTC Union website for more details.

Application


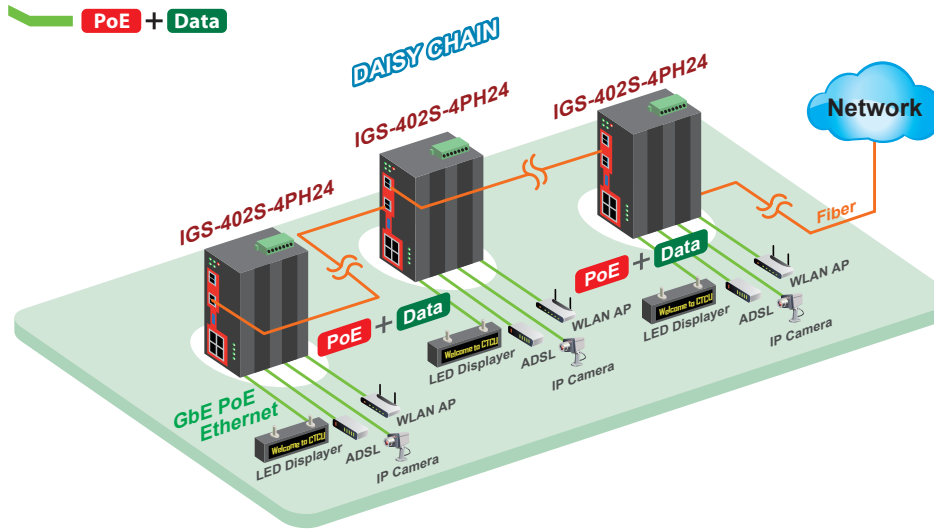


Figure : IGS-402S-4PH24 PoE Gigabit Ethernet Switch Transmission with Daisy Chain

Dimensions

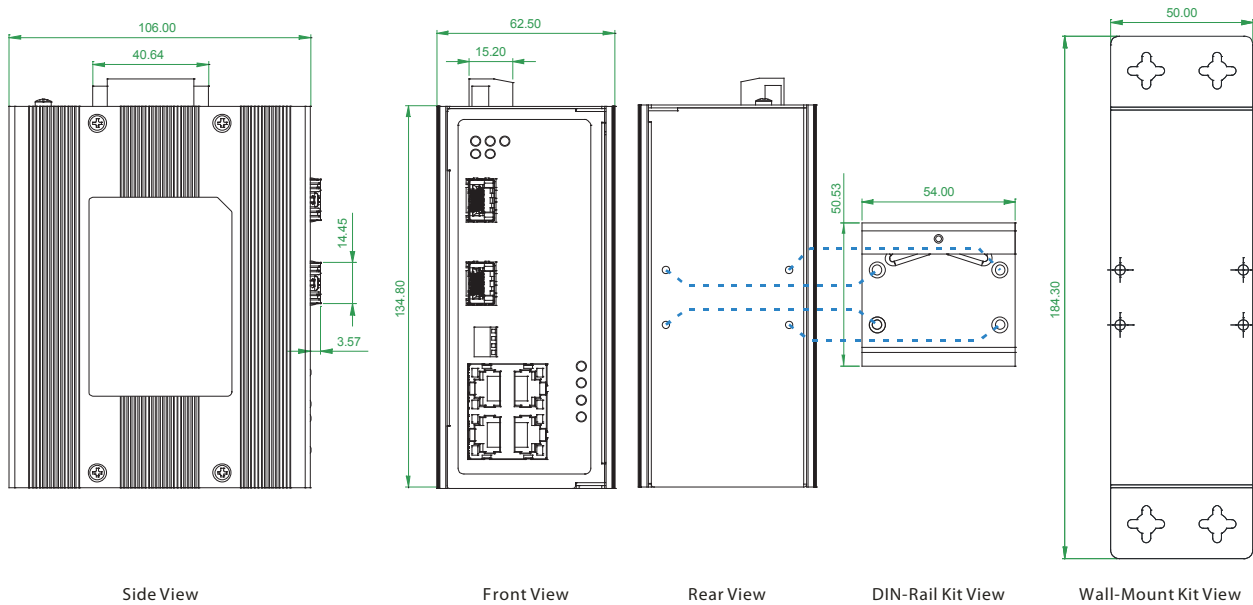

Ordering Information

Model Name	Description
IGS-402S-4PH24	4-Port 10/100/1000Base-T + 2-Port 100/1000Base SFP Slot with 4-PoE Switch (30W/Per Port, Total 120W, 24V Booster) (-10 ~ 60°C)
IGS-402S-4PHE24	4-Port 10/100/1000Base-T + 2-Port 100/1000Base SFP Slot with 4-PoE Switch (30W/Per Port, Total 120W, 24V Booster) (-40 ~ 75°C)

Accessories

DRP-120-24	Industrial Power, Input 88 ~ 132VAC / 176 ~ 264VAC, Output 24VDC, 120W, -10 ~ +60°C
DRP-240-48	Industrial Power, Input 85 ~ 264VAC, Output 48VDC, 240W, -10 ~ +70°C
SFP Transceiver	Compatible, Reliable, 5-year Warranty

Temperature
IGS - 402S - 4PH 24
 Example: IGS - 402S - 4PHE24

