



**Cable ID: K33946-0500-BK-2011-86434**

**Test Limit: TIA 568.2-D Patch Cord Cat6A 5.0m**

Limits Version: V7.0  
Date / Time: 2020-05-04 02:30:21 PM  
Operator: CJJ

**Headroom 6.0 dB (NEXT 3,6-4,5)**


Cable Type: Cat 6A U/FTP  
NVP: 74.0%

Main: Versiv  
S/N: 18060497  
Software Version: V6.0 Build 6  
Calibration Date: 2018-06-03  
Adapter: DSX-5000 (DSX-PC6A)  
S/N: 4126181


**Test Summary: PASS**

Remote: Versiv  
S/N: 18060417  
Software Version: V6.0 Build 6  
Calibration Date: 2018-06-03  
Adapter: DSX-5000R (DSX-PC6A)  
S/N: 4126178

Wire Map	1	2	3	4	5	6	7	8	S
<b>PASS</b>									
(T568B)	1	2	3	4	5	6	7	8	S




Length (m)	[Pair 1,2]	4.9
Prop. Delay (ns)	[Pair 3,6]	23
Delay Skew (ns)	[Pair 3,6]	1
Resistance (ohms)	[Pair 3,6]	3.28

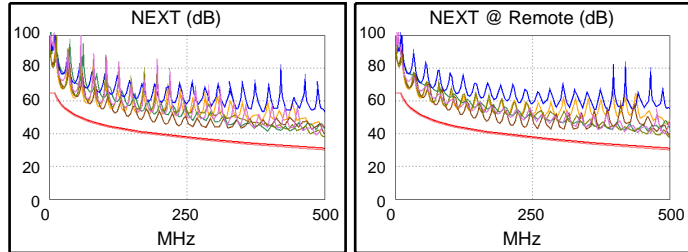

Worst Case Margin Worst Case Value

<b>PASS</b>	MAIN	SR	MAIN	SR
Worst Pair	3,6-4,5	3,6-4,5	3,6-7,8	3,6-7,8
<b>NEXT (dB)</b>	6.9	6.0	7.0	6.8
Freq. (MHz)	258.0	234.5	498.0	500.0
Limit (dB)	37.0	37.9	31.2	31.2

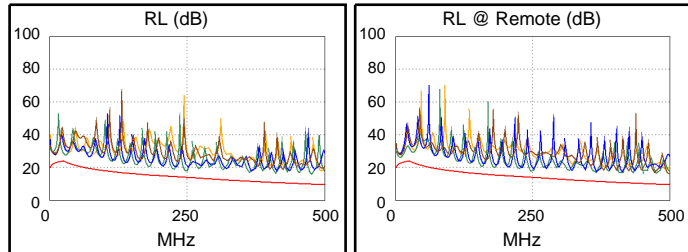

<b>PASS</b>	MAIN	SR	MAIN	SR
Worst Pair	3,6	3,6	3,6	3,6
<b>RL (dB)</b>	3.3	3.4	5.9	4.9
Freq. (MHz)	247.0	9.6	477.0	411.0
Limit (dB)	14.1	22.8	9.8	10.8