

# Wall Mount and Patch Enclosure

Medium, empty w/split metal door, one lock/key




Cleerline SSF™ wall mount fiber distribution units are designed to support patching and splicing in one unit. The enclosure has 4 adapter panel positions, allowing for a wide variety of fiber termination connector types. Two compartments separate the network terminations from the distribution terminations, and the unit has a double outer door with key lock.



## FEATURES AND BENEFITS

- Accommodates up to 4 adapter plates
- Cable entry tie down points
- Double door with key lock
- Top or bottom cable entry
- LGX® compatible adapter plates
- Compliant with NEMA-2 Standards

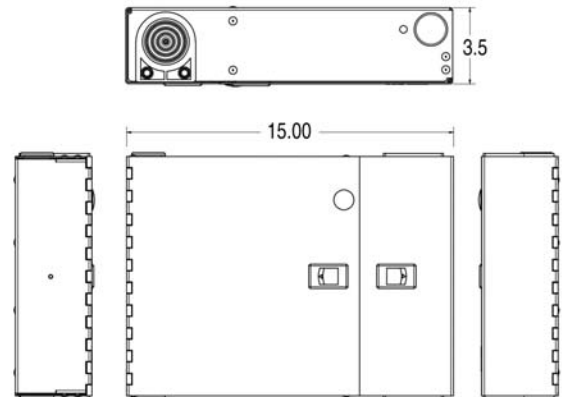

## SPECIFICATIONS

Adapter Plates	4
Splice Trays	4
Dimensions	11" H x 15" W x 3.5" D
Packaging	12" H x 17" W x 5" D
Weight	7 lbs empty/10 lbs typical loaded
Material	Aluminum, black powder coat
Compatible with	SSF™ Adapter Plates

## PART NUMBERS

SSF-MWM-SPLIT-WL-E4	Medium, empty with split metal door, with one lock/key
---------------------	--