

Product Data Sheet

☎ 1-888-452-HANA (4262) ✉ info@hanawireless.com

✉ 9465 Southampton Pl, Boca Raton, FL 33434, USA



Model: HW2-N14-1HF


14x12x7 Inch Weatherproof Enclosure with 120 Vac Mounting Plate, Thermostat Controlled Heating & Cooling System

Features

- Molded Fiberglass Reinforced Polyester (FRP)
- Stainless steel quick-release latches with padlock hasps
- NEMA Type 3R, 3RX / IP24 rated, fully gasketed lid
- Integral mounting flange, mast mounting option
- Aluminum mounting plate with 120 Vac outlets, thermostat-controlled fan/heater, patented (US8014157) slotted accessory mounting design

Applications

- Remote wireless LAN Wi-Fi equipment installations
- Indoor and outdoor installations
- Rapid deployment and hotspot installations
- Harsh and corrosive environments
- Protection of equipment from theft and damage

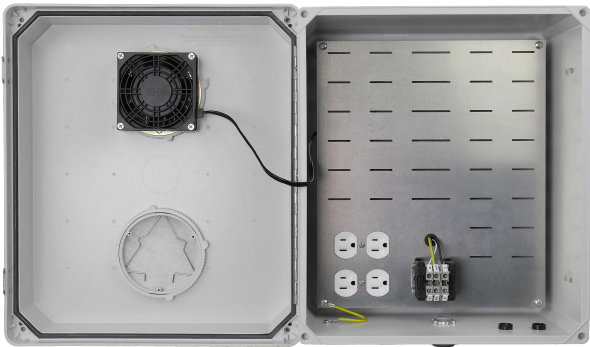

Specifications

Material	FRP
Color	Tool Gray – RAL 7035
Voltage Vac	120
Heater F° (C°)	140 (60) PTC-Type
Heat Temperature ON/OFF F° (C°)	40 (4) +/-5 / 60 (15) +/-3
Fan Power Watt	12
Fan Temperature ON/OFF F° (C°)	100 (38) +/-3 / 70 (21) +/-5
Mounting Plate Dimensions in (mm)	12.7 (322) x 10.8 (274) x 0.1 (2.5)
Mounting Plate Material	Anodized Aluminum
Weight lb (kg)	12.5 (5.7)
Outside Dimensions, Max in (mm)	15.5 (393) x 13.5 (342) x 8.7 (220)
Inside Dimensions in (mm)	13.5 (343) x 11.5 (292) x 5.8 (147)
Flame Rating	UL 94-5V
RoHS	Compliant
Environmental Rating NEMA - IP	3R, 3RX - 24
Cable Feed	1/2in Conduit Connector

Package Specifications

Package Quantity	1 per Carton
Length in (mm)	16.4 (417)
Width in (mm)	14.0 (356)
Depth in (mm)	13.2 (335)
Weight lb (kg)	13.0 (5.9)



Wireless That Works